



Auditory Steady State Responses to Broadband Noise in Human Auditory Cortex

Yadong Wang¹, Nayef Ahmar², Juanjuan Xiang², David Poeppel^{1,3,4,5}, Jonathan Z. Simon^{2,3,5}

¹Cognitive Neuroscience of Language Laboratory, ²Department of Electrical & Computer Engineering,


³Neuroscience and Cognitive Science Program, ⁴Department of Linguistics, ⁵Department of Biology
University of Maryland College Park




INTRODUCTION

In speech signals, perceptually relevant modulations coexist at different bandwidths and timescales.

Acoustic Constituents of Speech

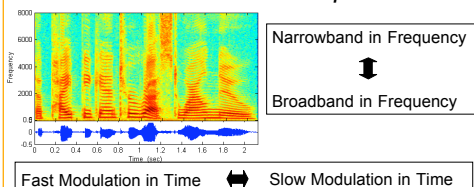


In this study we investigate the acoustic constituents of speech, idealized as simple sounds of varying bandwidths (from 0, 1/3, 2 to 5 octave) and varying temporal modulations (from 1.5, 3.5, 7.5, 15.5 to 31.5 Hz).

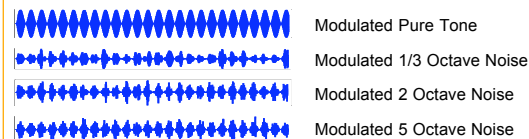


RESULTS

The Fourier transform of each channel's response is the frequency representation of that response. The amplitude and phase, at the modulation frequency, gives the SSR for that stimulus.




Complex Phasor Representation

The Amplitude and Phase at each channel can be shown with a complex vector ("phasor") at each channel, giving a graphical representation of the whole-head SSR.

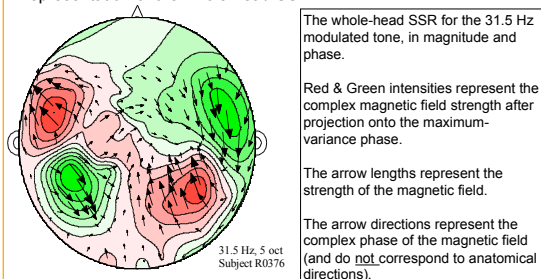

Identifying Statistically Significant Responses

A joint significance test incorporating amplitude (F-test) and phase (Rayleigh's Phase Coherence) identifies only those channels found to be significant (at $p = 1/157$, i.e. one false positive over the whole head).

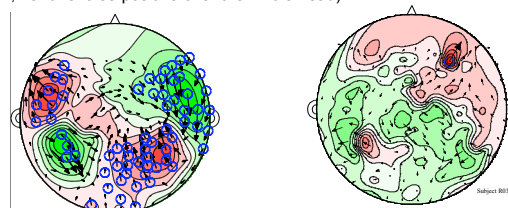


Response at 31.5 Hz for a 31.5 Hz modulated stimulus. 64 significant channels out of a total of 157. The blue circles denote significant channels.

Response at 1.5 Hz for a 7.5 Hz modulated stimulus. The blue circle denotes a 'significant' channel which we interpret as a false positive.


Whole Head Response Change with Stimulus

The whole-head SSR from one subject for 5 octave pink noise, at the five modulation frequencies 1.5, 3.5, 7.5, 15.5, and 31.5 Hz. Only significant channels are shown.

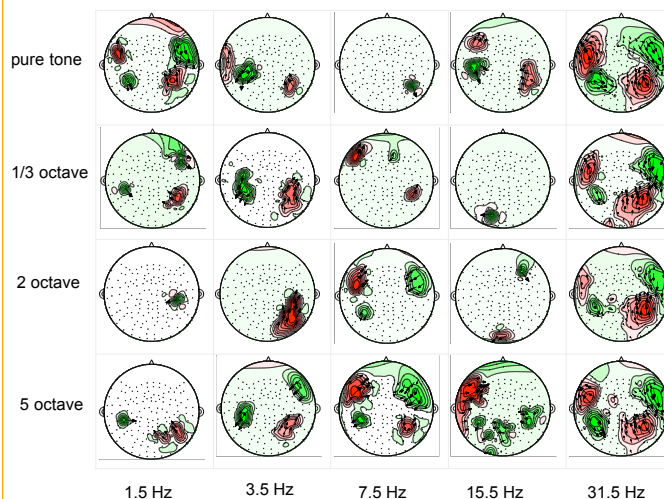

Transfer Functions

Left and right hemisphere complex equivalent dipoles give simple Modulation Transfer Functions (MTFs) for every stimulus bandwidth.

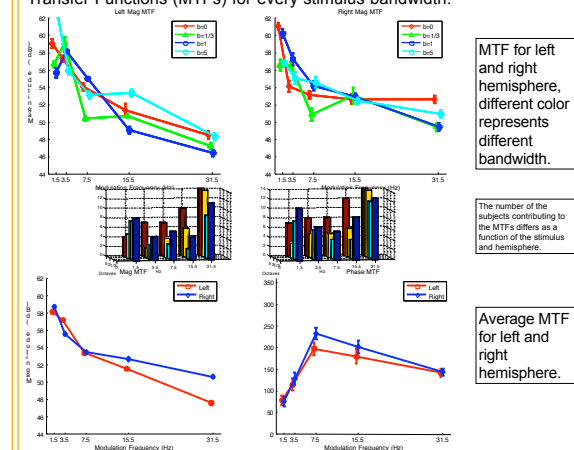

CONCLUSIONS

- MTF magnitude appears bandwidth independent.
- Right hemisphere advantage at highest frequency.
- MTF magnitude strongest below 8 Hz (i.e. low pass).

References

- Ross et al. (2000) A high-precision magnetoencephalographic study of human auditory steady-state responses to amplitude-modulated tones. *J Acoust Soc Am* 108, 679-691.
- Schoonhoven et al. (2003) A whole head MEG study of the amplitude-modulation following response: phase coherence, group delay and dipole source analysis. *Clin Neurophysiol* 114, 2096-2106.
- Baillet et al. (2001) Electromagnetic brain mapping. *Signal Processing Magazine, IEEE*, 18, 14-30.
- Mosher et al. (1999) EEG and MEG: forward solutions for inverse methods. *Biomedical Engineering, IEEE Transactions on*, 46, 245-259.
- Ahmar et al. (2005) Significance tests for MEG response detection. *International IEEE EMBS Conference on Neural Engineering*.
- Simon, J. Z. and Y. Wang (2005). Fully Complex Magnetoencephalography. *J Neurosci Methods* 148(1), 64-75.
- Ligeois-Chauvel et al. (2004) Temporal Envelope Processing in the Human Left and Right Auditory Cortices. *Cerebral Cortex* 14, 731-740.

METHODS

- **Recording**
 - Magnetic signals were recorded using a 160-channel, whole-head axial gradiometer system (KIT, Kanazawa, Jp.).
 - Sampling rate 500 Hz, bandpassed between 1 Hz and 200 Hz, with notch at 60 Hz.
 - LMS was used with external noise channels and cardiac (heartbeats) channels.
- **Stimuli**
 - 20 different stimuli (2000 ms stimulus duration), each a sinusoidal amplitude modulation of a carrier, with:
 - 5 modulation frequencies: 1.5 Hz, 3.5 Hz, 7.5 Hz, 15.5 Hz and 31.5 Hz.
 - 4 carriers: pure tone at 707 Hz; 1/3, 1, and 5 octave pink noise centered at 707 Hz.
 - 50 repetitions per stimulus; interstimulus intervals from 700 to 900 ms; loudness approximately 70 dB SPL.
- **Analysis**
 - Concatenated responses from 50 to 2000 ms post-stimulus gave 20 total responses (100 s duration) for each channel.
 - The Discrete Fourier Transform (DFT) results in 20 frequency responses (0.01 Hz resolution) for each channel.
 - The SSR is the DFT's amplitude and phase at the modulation frequency (and harmonic frequencies, if significant).
 - The dipoles were fit to each hemisphere independently, requiring a minimum of three channels/hemisphere.

Acknowledgements

Thanks to Kensuke Sekihara for help. YW and DP are supported by NIH R01DC05660.